


WIRING DIAGRAM LDS-NTG45-CP

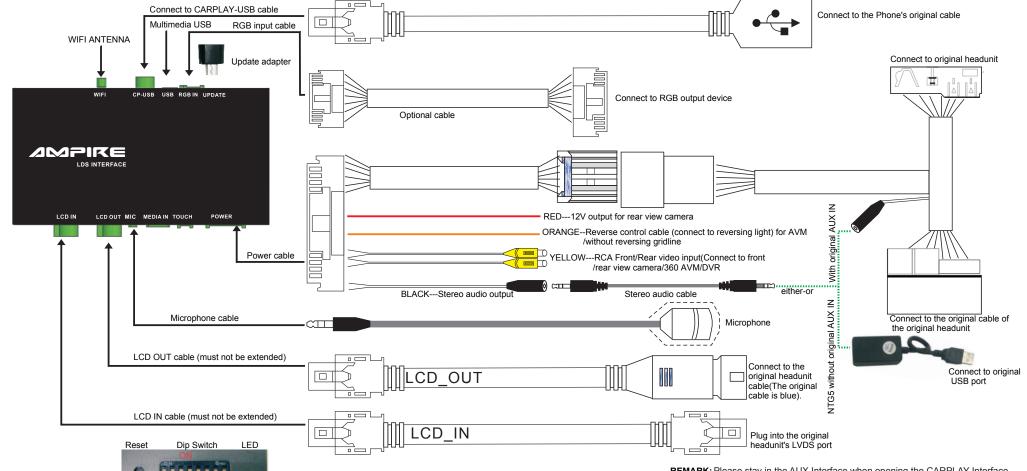

NTG4.5/4.7--DIP SWITCH SETTING

(After changing the dip code, press "reset" or power-on again)

DIP S/W	Status	Description
PIN 1	OFF/ON	7inch (800*480) / 5.8 inch (480*234)
PIN 2	OFF/ON	NG / NG
PIN 3	OFF/ON	Close front camera / Open front camera
PIN 4	OFF/ON	Reversing gridline/Enable 360 panoramic
PIN 5	OFF/ON	NG / NG
PIN 6	OFF/ON	Rear view camera CVBS input / RGB input
PIN 7	OFF/ON	NG / NG
PIN 8	OFF/ON	After market rear camera / Original rear camera

NTG5.1/5.2/5.5--DIP SWITCH SETTING

(After changing the dip code, press "reset" or power-on again)

DIP S/W	Status	Description
PIN 1, 2	OFF/ON	15~18 C class 7 inch / 15~17 S class 12.3 inch
PIN 2, 3	OFF/ON	NG/15~17 S class 12.3 inch with other parameters
PIN 1	ON	15~18 year,all BENZ models with 8.4inch monitor
PIN 2	ON	15~18 A/B/E/CLA/GLE class with 7 inch monitor
PIN 4	OFF/ON	Reversing gridline/Enable 360 panoramic
PIN 5	OFF/ON	NG / NG
PIN 6	OFF/ON	Rear view camera CVBS input / RGB input
PIN 7	OFF/ON	NG / NG
PIN 8	OFF/ON	After market rear camera / Original rear camera

REMARK: Please stay in the AUX Interface when opening the CARPLAY Interface



- 1) Long press and hold the "BACK" Button to enter the Interface, short press the "BACK" Button again to exit.
- 2) Short press the "C" or "★" Button to open "Siri".
- 3) Knob to control up/down/right/left/ok.