

Prior to installing the Saddle Tramp BC-DSP, it is important to update the factory radio. The steps outlined below will demonstrate how to update, using a Windows PC.

NOTE: DSP Harness must not be connected when updating the OEM radio

Updating the factory installed radio:

- Click/copy this link tiny.cc/6z0fvz
- Select the Radio type

The screenshot shows the Harley-Davidson H-D Service Information Portal. The page title is 'H-D SERVICE INFORMATION PORTAL' and the URL is 'ISRQSG_1267029_1571025_en_US'. The main heading is 'INFOTAINMENT SUPPORT RESOURCES'. Below this is a search bar with the text 'Enter search term' and a search icon. To the right is the Harley-Davidson logo and the word 'INSTRUCTIONS'. Below the logo is the text 'Infotainment Support Resources'. The main content area is titled 'ISRQSG' and contains a 'Table of Content' section. The 'Table of Content' lists several categories: 'Infotainment Control Unit (IFCU)', 'BOOM! BOX Audio', 'Advanced Audio System', 'Wireless Connectivity', and 'Electric Vehicle (EV)'. Under 'Infotainment Control Unit (IFCU)', there are four sub-items: 'Infotainment Control Unit (IFCU)', '2019 and Later BOOM! GTS', 'BOOM! BOX 6.5GT', and 'BOOM! BOX 4.3 Standard Radio'. A red box highlights the 'Infotainment Control Unit (IFCU)' sub-item, and a red arrow points from the text 'Select the Radio type' to this sub-item.

Updating the factory installed radio:

- Select the region the vehicle was originally sold in
 - In this example we're using North America
- NOTE: If you have a 6.5GT radio, please note the CVO variant

BOOM! BOX 4.3 Standard Radio

Table 7. BOOM! BOX 4.3

SOFTWARE AND APPLICATION	LATEST VERSION	SOFTWARE FILE LOCATION	HARDWARE PART NUMBER	OWNER'S MANUAL
BOOM! BOX 4.3 Standard - North America	1.22.0.1	BOOM_4.3_Standard_Radio - North America	76000075	Latest BOOM! BOX 4.3 Owner's Manual
BOOM! BOX 4.3 Standard - International	1.22.0.1	BOOM_4.3_Standard_Radio - International	76000230	

BOOM! BOX 6.5GT

Table 5.

SOFTWARE AND APPLICATION	LATEST VERSION	SOFTWARE FILE LOCATION	HARDWARE PART NUMBER	OWNER'S MANUAL
BOOM! BOX 6.5GT Premium Radio - North America	1.22.0.3	GEN1_BOOM_6.5GT_Premium_Radio - North America	76000076	2018 BOOM! BOX Owner's Manual
BOOM! BOX 6.5GT Premium Radio - Europe	1.22.0.3	GEN1_BOOM_6.5GT_Premium_Radio - Europe	76000231	
BOOM! BOX 6.5GT Premium Radio - International	1.22.0.3	GEN1_BOOM_6.5GT_Premium_Radio - International	76000232	
BOOM! BOX 6.5GT CVO Premium Radio - North America	1.22.0.3	GEN1_BOOM!_BOX_6.5GT_CVO_Premium_Radio - North America	76000228	
BOOM! BOX 6.5GT CVO Premium Radio - Europe	1.22.0.3	GEN1_BOOM!_BOX_6.5GT_CVO_Premium_Radio - Europe	76000229	

BOOM! BOX Audio




2019 and Later BOOM! GTS

Table 3.

SOFTWARE AND APPLICATION	LATEST VERSION	LATEST SOFTWARE FILE	HARDWARE PART NUMBER	OWNER'S MANUAL
BOOM! BOX GTS - North America	M23.22.27.00	swdl_boombox_GTS_DOM.zip	<ul style="list-style-type: none"> 76000783 76000779 76000786 76000796 	BOOM! BOX GTS Owner's Manual
BOOM! BOX GTS - Europe (HDI)	M23.22.27.00	swdl_boombox_GTS_HDI.zip	<ul style="list-style-type: none"> 76000784 76000780 76000787 76000797 	
BOOM! BOX GTS - Rest of World (ROW)	M23.22.27.00	swdl_boombox_GTS_ROW.zip	<ul style="list-style-type: none"> 76000785 76000781 	

Updating the factory installed radio:

- Download the .ZIP file
- Right click mouse, select “Extract all”
- Click browse and click the USB drive
- Click Extract

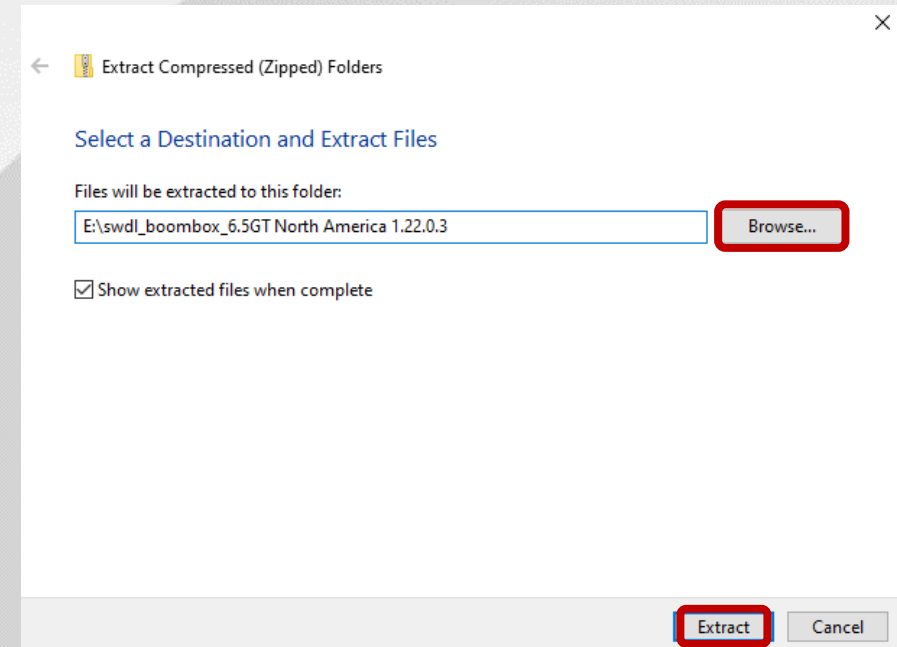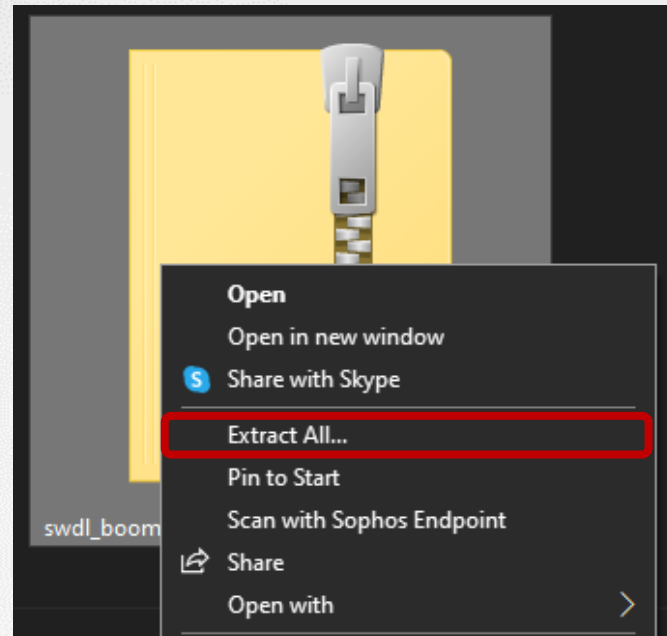

Updating the factory installed radio:

- Connect USB to radio port on the motorcycle
- Turn on motorcycle
- A screen will pop up, click OK




Updating the factory installed radio:

- Wait for the authentication process to AutoStart



Updating the factory installed radio:

- With ignition on, Click YES

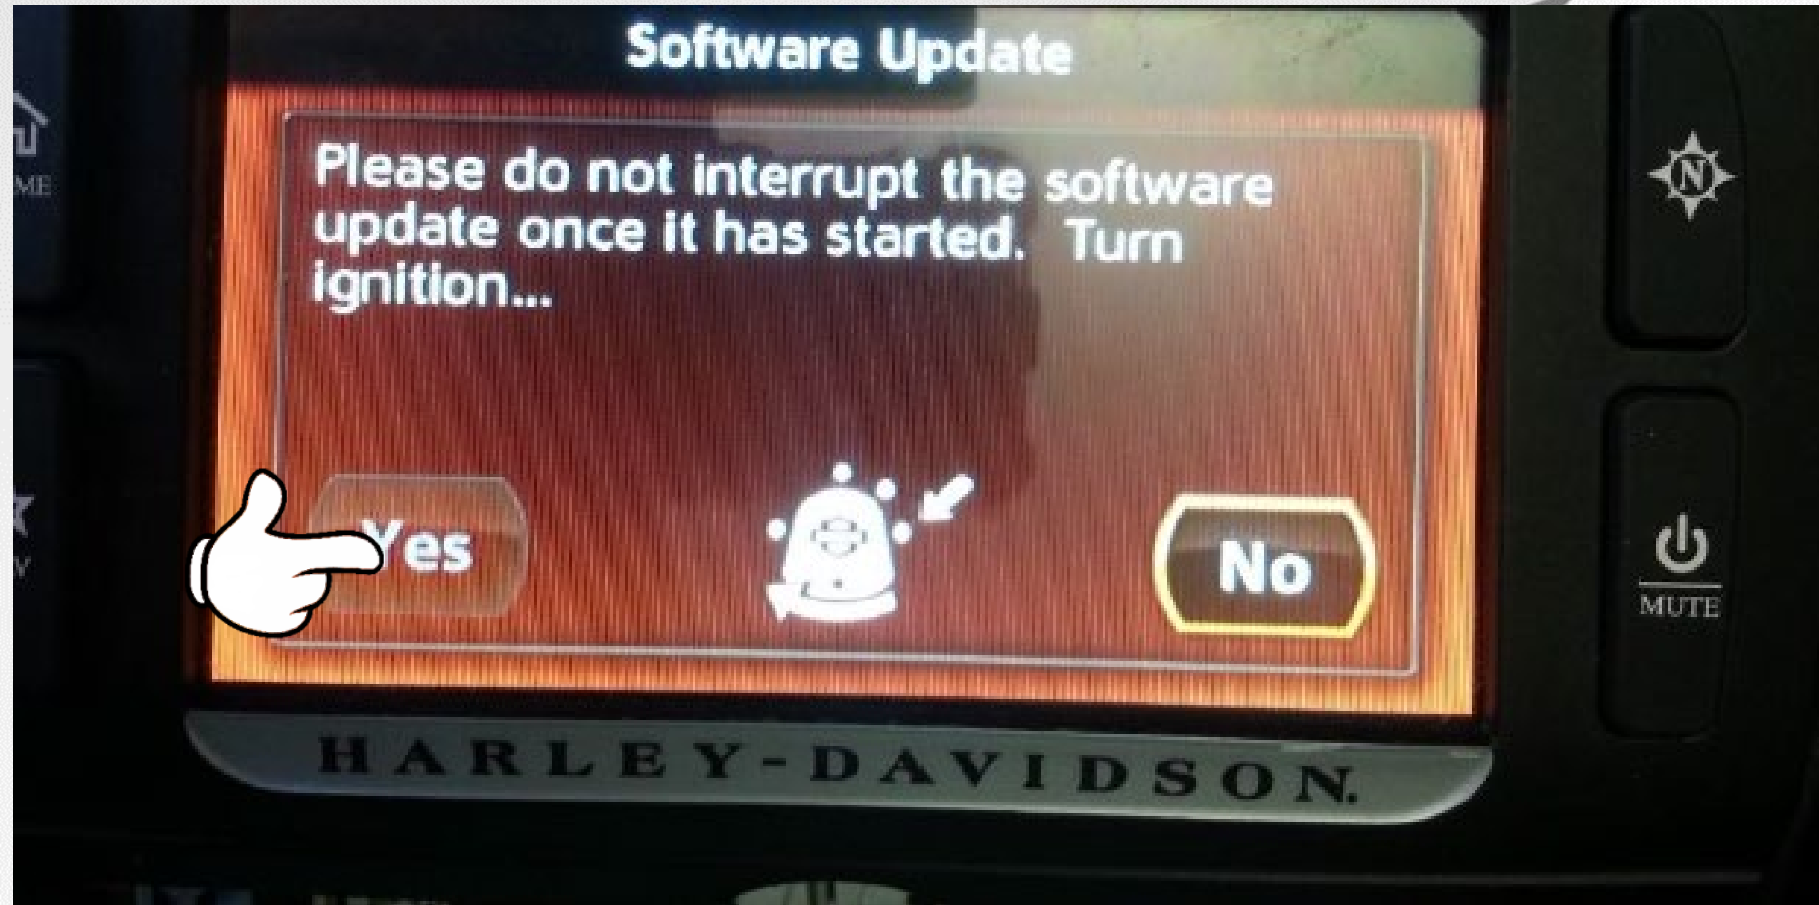

Updating the factory installed radio:

- Wait until the updated is complete
- Radio will restart
- Turn off Motorcycle
- Remove USB from vehicle

