




HEISE® Led Lighting Systems Technical Operation Specification Parameters

The Heise HE-SWP8 has eight switch circuits, each has a maximum current rating. For circuits 1 and 2 maximum is 30 amp, circuits 3 through 8, maximum is 20 amp. The total operating amperage of the connected accessories cannot exceed 60amps (600 watts). You may have multiple devices connected that total more than 60 amps, but you cannot have them turned on at the same time.

The panel comes configured with the following fuses.

Breaker	Circuit 8	Circuit 7	Circuit 6	Circuit 5	Circuit 4	Circuit 3	Circuit 2	Circuit 1
60A	5A	5A	10A	10A	20A	20A	30A	30A

Example of Wiring Layout*

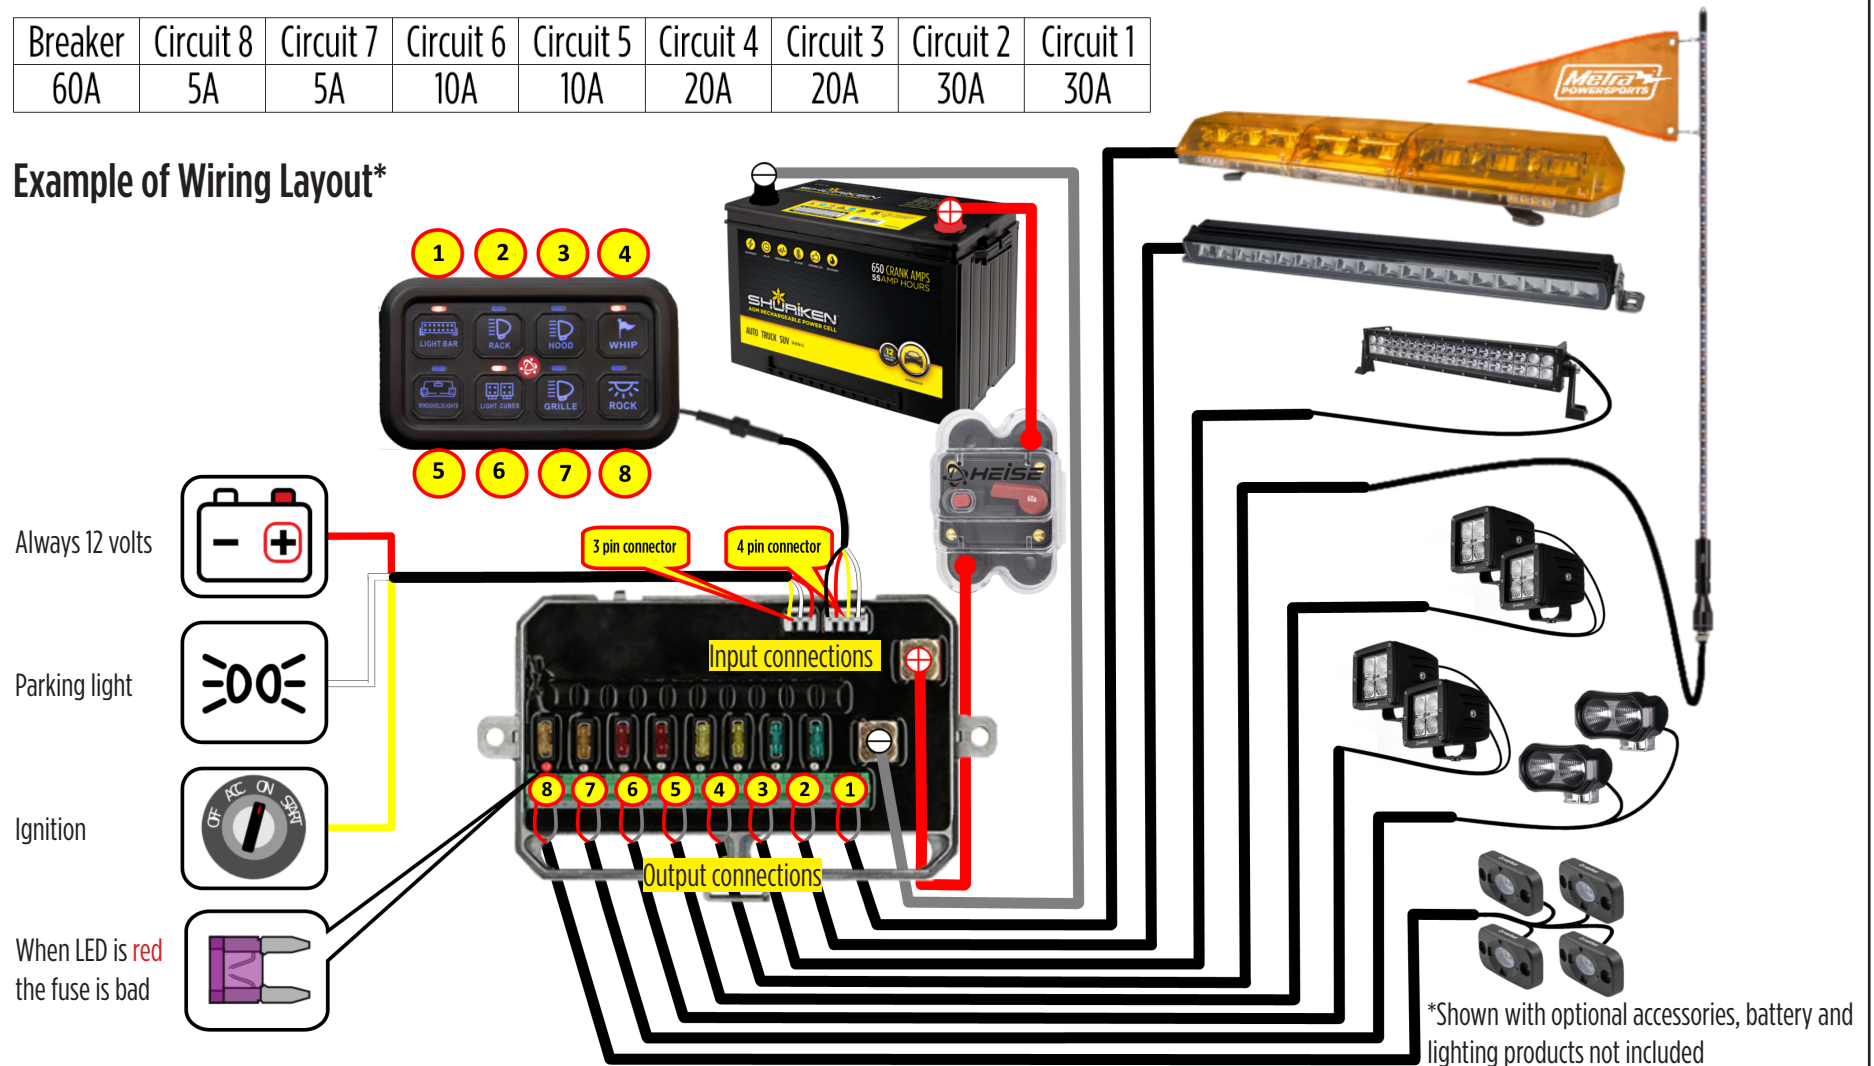

Attention: If you decide to not use the supplied power and ground wire, consult a wire gauge chart for correct size and distance.